

uPVC & HDPE PIPE

UNILON®

SYMBOL OF HIGH QUALITY PIPE



SNI CERTIFICATES FOR UNILON'S CONDUIT:

SNI 04-1701-1989 & SNI 1702-1989-C
for 390 Class, OD 20, 25 and 32 mm

OTHER CERTIFICATIONS BY:



PT PLN (Persero)

FEATURE & APPLICATION

CONDUIT PIPE DIMENSIONS:

OD (mm)	Thickness (mm)	Length (m)
20	1,45	2,9
25	1,45	2,9
32	1,75	2,9




Bendable



Fire Retardant

CONDUIT PIPE ACCESSORIES

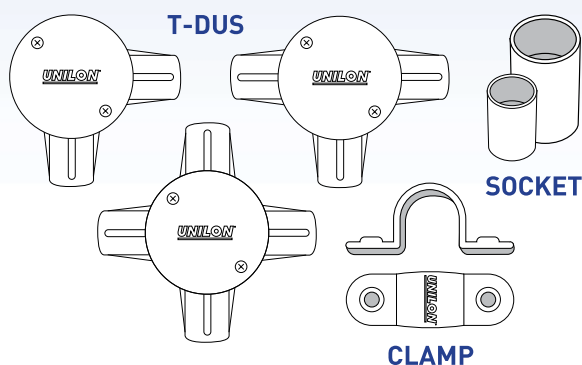

Electrical



CCTV



Telephone Line



Data Cabling



Industrial Signaling

Distributed by

PT HARAPAN WIDYATAMA PERTIWI

Jl. Agung Karya V Blok B No. 8-9, Sunter Podomoro, Jakarta 14340
 Telp. (021) 650-6403 (HUNTING) Fax. (021) 651-0564, 651-0596
 Website: www.unilon.co.id Email: sunter.unilon@yahoo.co.id